





TOP RESISTANCE FOR WEIGHT AREAS.

PAVIGYM™ Extreme is the most resistant flooring solution for the heavy weight, free weight and weight-training (cross training) areas.

Developed with a specific combination of PAVIGYM™ components, Extreme gives the higher level of wear resistance and flexibility of its category.


- **EXTREME (7mm):** top resistance against damage. Absorbs the impact force of falling objects.

- NEW** ■ **EXTREME S&S (22mm):** Its extra-thickness provides even more protection against impacts.

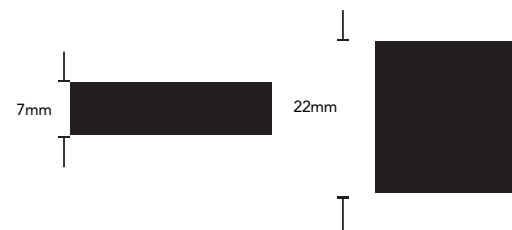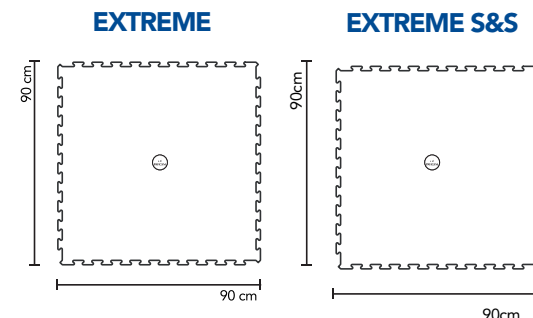

COLOURS.

EXTREME.

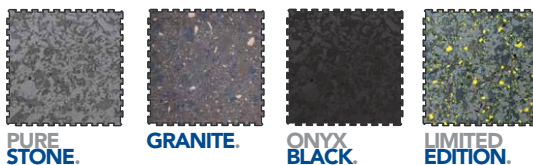

EXTREME S&S. NEW



REFERENCES.

	EXTREME.	EXTREME S&S.
PURE STONE	R107.001	R113.001
GRANITE	R107.002	R113.002
ONYX BLACK	R107.003	R113.003
LTD. EDITION	R107.004	R113.004
ARMY	-	R113.009



TECHNICAL DETAILS.

	NORM	EXTREME	EXTREME S&S
THICKNESS		7 mm	22 mm
NET DIMENSIONS		90x90 cm	90 x 90 cm
WEIGHT		7,2 kg	15,5 Kg
DENSITY	UNE-53526	1.200 kg/m ³	900 Kg/m ³
WATER ABSORPTION	ASTM D570	0%	0%
COEFFICIENT OF LINEAR DILATATION	0°C-40°C	1,5 10 ⁻⁴ °C ⁻¹	10 ⁻⁴ °C ⁻¹
FIRE REACTION	EN 13501-1	Cfl-s2	Efl
INSTALLATION SYSTEM		INTERLOCKING	INTERLOCKING

Average values obtained in normal environment conditions.
PAVIGYM™ reserves the right to change the product characteristics at any time.

INSTALLATION INFORMATION:

COMPARATIVE CHART.

	PAVIGYM™ ENDURANCE S&S	PAVIGYM™ ENDURANCE	RECYCLED RUBBER (ROLLS)	PAVIGYM™ EXTREME S&S	PAVIGYM™ EXTREME
COMFORT	*****	***	**	*****	***
ENERGY RESTITUTION/ POINT ELASTICITY	*****	***	***	*****	***
MARKS RESISTANCE (Regular Loads)	*****	*****	****	*****	*****
MARKS RESISTANCE (Big Loads)	****	**	**	*****	***
SOUND INSULATION	*****	***	***	*****	***
THERMAL INSULATION	*****	***	***	*****	***
DURABILITY	****	*****	***	****	*****
WATER RESISTANCE	*****	*****	*****	*****	*****
HYGIENIC/ANTI-BACTERIAL PROTECTION	***	*****	***	***	*****
EASY TO INSTALL	****	*****	***	***	*****
EASY TO MAINTAIN	****	*****	**	**	*****
AESTHETICS	*****	*****	*	*	*****